

Design flexibility
that's affordable.
With James Hardie,
It's Possible™



Hardie® Panel

Hardie® Architectural Panel

① interstudio

 **JamesHardie™**



Hardie® Panel and Hardie® Architectural Panel
are independently EPD certified
for the full product lifecycle.



The ecobau institute in Switzerland has confirmed that Hardie®
Panel is fulfilling the highest requirements concerning ecological
performance by awarding the highest possible certificate of eco-1.

IT'S POSSIBLE

Content

James Hardie™	04
With James Hardie. It's Possible™	10
The Hardie® Panel Products	12
Hardie® Architectural Panel	14
Hardie® Architectural Panel Metallics	18
Hardie® Panel	22
A reliable System	26
Expertise on your Side	28
Smart Sustainability	30
Technical Information	32
Project Support	34



IT'S POSSIBLE™

James Hardie™


James Hardie leading the manufacture of high-performance fibre cement and fibre gypsum building solutions. As the trusted innovator and industry leader, we empower homeowners and building professionals alike to achieve their dreams with premium quality solutions.

Our products enable endless possibilities for designing forever homes and exceptional buildings, whilst also delivering trusted protection and long-lasting beauty.

We are a fast-paced company dedicated to our customers. We strive to deliver market driven innovation, an inclusive and empowering culture, and an unwavering commitment to our Zero Harm safety initiative. Whilst operating with a global mindset, we put great care into how our business can support the local communities in which we operate, live and work in.

Our cladding products not only create a stylish stand-alone solution, but also look great with other building materials such as stone, wood and brick, making design potential endless. We will provide sustainable solutions for your project, giving you affordable, individual designs, energy efficiency and everything you need to ensure your project looks stunning for years to come.



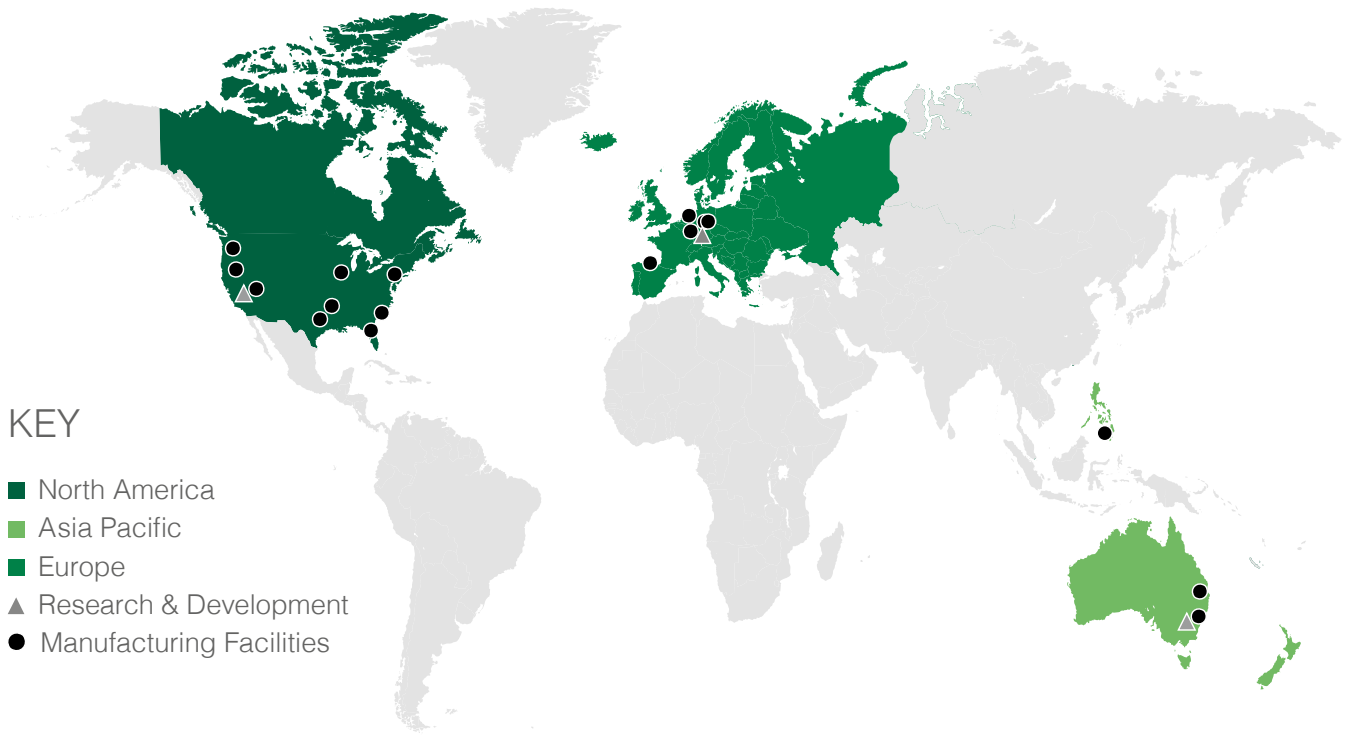

Build your projects with a global organisation
that's been pursuing excellence since 1888.





**Hardie®
Panel**




HARDIE® ARCHITECTURAL PANEL

Metallics



HARDIE® ARCHITECTURAL PANEL

Brushed Concrete



HARDIE® ARCHITECTURAL PANEL

Smooth Sand



Ease of Mind

Our cladding products are backed by an A2 fire-rating and an industry leading 15-year warranty.

Affordable Performance

With unmatched price performances, we bring design and value to every project.

Design Flexibility

A choice of textures and custom colour will enable you to build modern, contemporary designs.

**A2 FIRE RATED PERFORMANCE
THAT'S AFFORDABLE**

With James Hardie. It's Possible™

If you are looking for high performance, A2 fire-rated facade claddings at an affordable price – Hardie® Panel products are the right choice for your next project.

Whatever look you choose, you know you're getting the strength and durability your clients deserve – making it a smart and cost-effective solution for any project.

A2
fire-rated

15 Year
Warranty





Endless design possibilities

Hardie® Panel and Hardie® Architectural Panel are some of the most innovative products when it comes to fibre cement facade cladding.

They do not only impress with performance but are also a real design all-rounder: pick any of our amazing colours or your individual colour, choose a texture, and make every project individual.

Hardie® Panel comes in a natural fibre cement surface. Hardie® Architectural Panel is available in two textures, Brushed Concrete, and Smooth Sand. All of the textures are available in 6 standard colours and custom colour.

An outstanding solution

Hardie® Architectural Panel Metallics combines the look of a fibre cement facade cladding with a special metallic look that comes in 6 metallic colours.

Application

Hardie® Panel and Hardie® Architectural Panel facade claddings can be used in rainscreen facades and soffits, fixed to either timber or metal sub-frames or masonry walls using corrosion resistant fixings.

YOUR GO-TO SOLUTION FOR SUSTAINABLE FACADES

Building a better future for all™

Hardie® Panel and Hardie® Architectural Panel facade claddings are medium-density fibre cement panels, specifically engineered to meet the European climate conditions for external claddings.

With their unmatched design flexibility in combination with affordability, they are the go-to ventilated facade cladding solution for renovation or new built. Not only built to last, they are also optimized for low resource use and related CO₂ emissions, setting new sustainability standards.



SMART SUSTAINABILITY
MEETS DESIGN FLEXIBILITY

Hardie® Architectural Panel





Technical values

Thickness	8 mm	11 mm
Length*	Raw: 3048 mm Net: 3038 mm	
Width*	Raw: 1220 mm Net: 1210 mm	
Density	~ 1300 kg/m ³	
Weight	11,2 kg/ m ²	13,7 kg/m ²
Thermal conductivity	$\lambda_{10, tr} = 0,23 \text{ W/mK}$	
Thermal resistance	$R_{10, tr} = 0,035 \text{ m}^2\text{K/W}$	$R_{10, tr} = 0,048 \text{ m}^2\text{K/W}$
Flexural strength (as per EN 12467)	14,0 MPa perpendicular to fibre direction 8,5 MPa parallel to fibre direction	17,0 MPa perpendicular to fibre direction 11,8 MPa parallel to fibre direction
Modulus of elasticity	5100 N/mm ²	
Linear Strain	$\leq 0,05 \text{ mm/m}^{*1}$	
Impact Resistance (soft and hard impact as per EAD 090062-00-0404) ^{*2}	–	Category 1 (H1-3, S1-4)

A2
fire-rated

15 Year
Warranty



* trimming of 5 mm per side is
recommended for squareness



^{*1} between 30 % and 90 % rel. humidity

^{*2} on timber aluminum steel and NV3

TEXTURE & COLOUR

Hardie® Architectural Panel

Hardie® Architectural Panel is available in two textures:
Smooth Sand and Brushed Concrete. These textures
will enable you to build modern, contemporary designs
– specifically formulated to give you a long-lasting and
low maintenance, consistent finish for years to come.





A modern look

Our standard colour range gives a choice of minimalistic white, grey beige or black tones to choose from. Pure one coloured facades or a combination of them will give your building a unique, modern and clean style. And for an even more individual aesthetic look you can request your individual custom colour on each of our surfaces.




Arctic White



Light Mist



Cobblestone



Grey Slate



Anthracite Grey



Midnight Black


Custom colour

Not the right colour for you? Hardie® Architectural Panel is available in custom colour – choose from your favourite colour systems like RAL or NCS – for unique buildings and maximum design flexibility.

UNIQUE FIBRE CEMENT TEXTURE
WITH A METALLIC LOOK

Hardie® Architectural Panel Metallics



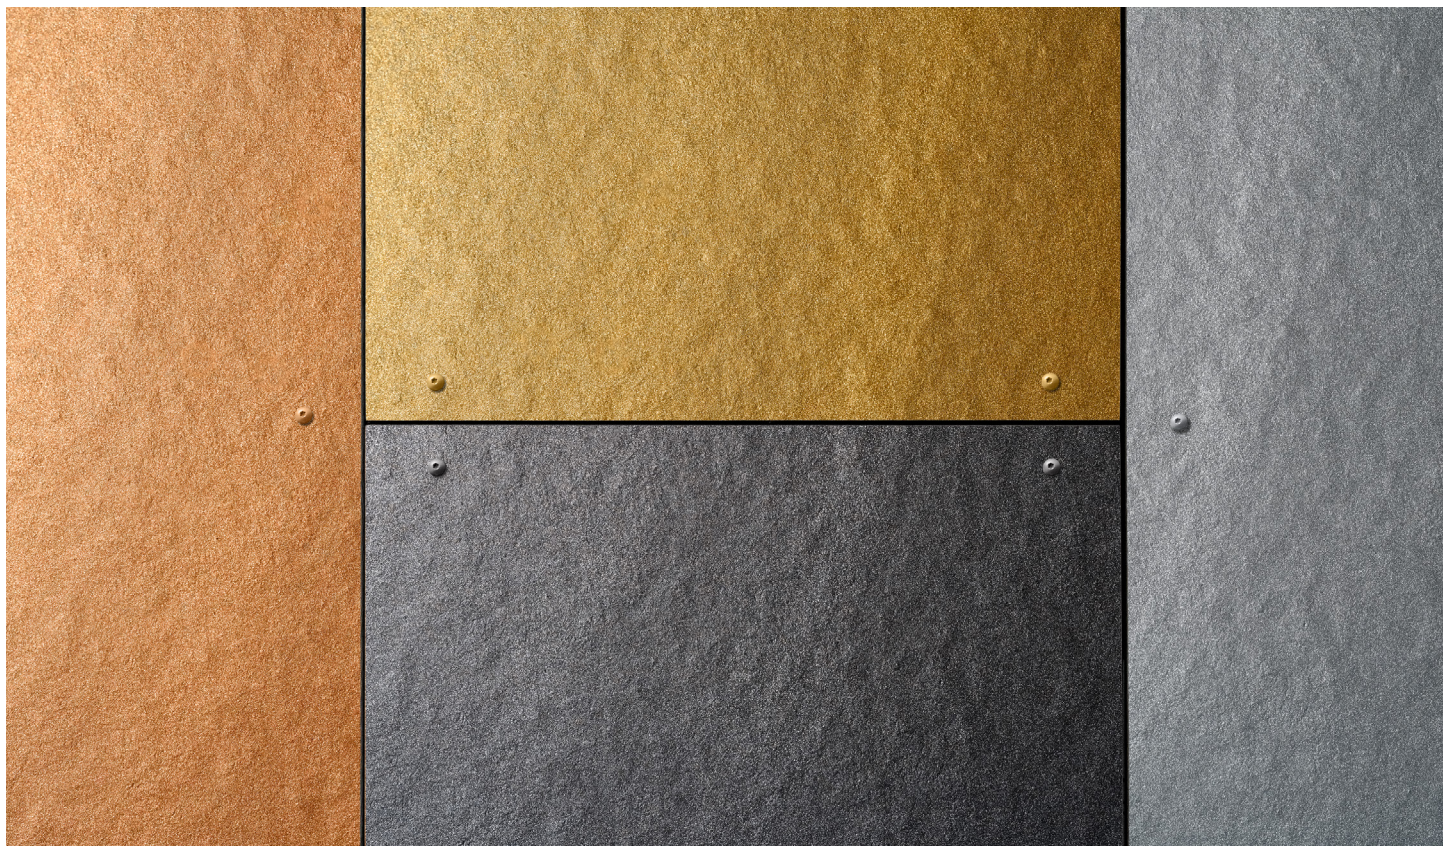

Technical values

Thickness	8 mm	11 mm
Length*	Raw: 3048 mm Net: 3038 mm	
Width*	Raw: 1220 mm Net: 1210 mm	
Density	~ 1300 kg/m ³	
Weight	11,2 kg/ m ²	13,7 kg/m ²
Thermal conductivity	$\lambda_{10, tr} = 0,23 \text{ W/mK}$	
Thermal resistance	$R_{10, tr} = 0,035 \text{ m}^2\text{K/W}$	$R_{10, tr} = 0,048 \text{ m}^2\text{K/W}$
Flexural strength (as per EN 12467)	15,5 MPa perpendicular to fibre direction 10,1 MPa parallel to fibre direction	18,0 MPa perpendicular to fibre direction 12,5 MPa parallel to fibre direction
Modulus of elasticity	6200 N/mm ²	
Linear Strain	$\leq 0,05 \text{ mm/m}^{*1}$	
Impact Resistance (soft and hard impact as per EAD 090062-00-0404) ^{*2}	–	Category 1 (H1-3, S1-4)

A2
fire-rated

15 Year
Warranty



* trimming of 5 mm per side is
recommended for squareness

^{*1} between 30 % and 90 % rel. humidity

^{*2} on timber aluminum steel and NV3

TEXTURE & COLOUR

Hardie® Architectural Panel Metallics

Your perfect match: Hardie® Architectural Panel
Metallics combines the advantages of fibre cement
facade cladding with a metallic look. Elevating your
design flexibility to a new level.



Natural Fiber
Cement



Silver



Gold



Copper



Steel



Bronze



Gun Metal

Setting accents

Our Metallics colourline has been inspired by typical metal materials, combining them with the unique look of our fibre cement surface.

When exposed to natural sunlight, the facade panel will show its metallic sparkling, allowing you to integrate special accents into your building.

MEDIUM DENSITY FIBRE CEMENT
ENGINEERED FOR EUROPEAN CLIMATE

Hardie® Panel





Technical values

Thickness	8 mm	11 mm
Length*	Raw: 3048 mm Net: 3038 mm	
Width*	Raw: 1220 mm Net: 1210 mm	
Density	~ 1300 kg/m ³	
Weight	11,2 kg/ m ²	13,7 kg/m ²
Thermal conductivity	$\lambda_{10, tr} = 0,23 \text{ W/mK}$	
Thermal resistance	$R_{10, tr} = 0,035 \text{ m}^2\text{K/W}$	$R_{10, tr} = 0,048 \text{ m}^2\text{K/W}$
Flexural strength (as per EN 12467)	15,5 MPa perpendicular to fibre direction 10,1 MPa parallel to fibre direction	18,0 MPa perpendicular to fibre direction 12,5 MPa parallel to fibre direction
Modulus of elasticity	6200 N/mm ²	
Linear Strain	$\leq 0,05 \text{ mm/m}^{*1}$	
Impact Resistance (soft and hard impact as per EAD 090062-00-0404) ^{*2}	–	Category 1 (H1-3, S1-4)

A2
fire-rated

15 Year
Warranty



* trimming of 5 mm per side is
recommended for squareness


^{*1} between 30 % and 90 % rel. humidity

^{*2} on timber aluminum steel and NV3

TEXTURE & COLOUR

Hardie® Panel

Hardie® Panel is available in a natural fibre cement texture and a variety of core colours – and if you need something special, you can choose from almost any colour – for your individual design.

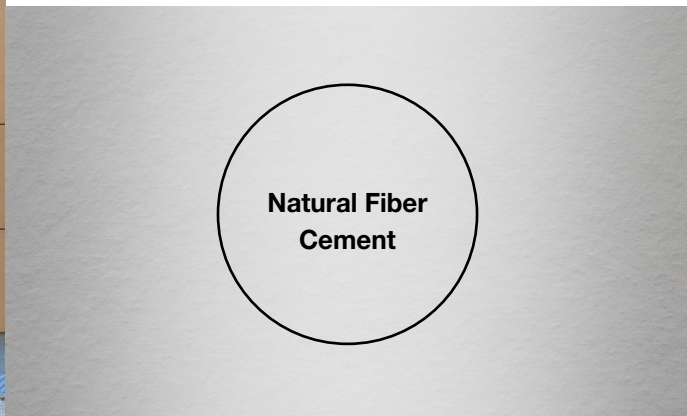




Modern colours for clean lines

For your individual look, you can play with one of our standard colours from the modern colourline we offer. Or further upgrade your building by adding in or choosing your individual custom colour.



Custom colour

Not the right colour for you? Hardie® Architectural Panel is available in custom colour – choose from your favourite colour systems like RAL or NCS – for unique buildings and maximum design flexibility.




Hardie™ Panel MetalTrim™

Length: 3000 mm, for exterior corners.
Available in all standard colours to match the Hardie® Panel range.



Hardie™ Seal edge coating

Essential for optimum installation.
Use for coating cut ends to ensure long lasting performance of the facade.



Hardie™ Fixed point sleeve

Aluminium fixed point sleeve in 9,4 x 6 mm for centric insertion of the fixings.



Hardie™ Panel Rivet

with stainless steel rivet mandrel for the installation of Hardie® Panel cladding to metal sub-frames.



Hardie™ Panel screws for timber

A2 stainless steel screws for attaching the Hardie® Panel cladding to wooden sub-frames.



Hardie™ Centralising Tool

Used on pre-drilled panel to ensure a concentric hole is drilled in the aluminium behind the panel.

FINISHING TOUCHES

A reliable System



Our accessories were developed for easy installation and perfectly complement to our Hardie® Panel cladding range, providing an overall system you can rely on.

Hardie™ Panel MetalTrim™ profiles are the perfect finish for a modern facade with accessories that fit the panel colour perfectly, by creating a nice contrast with colour-headed fixings and profiles. Colour matched rivets or screws can also be sourced for your project.



THE BEST

Expertise on your Side

Our dedicated team of Hardie® Panel experts have extensive experience and specialist knowledge to support your project so contact us to see how we can help meet your requirements. Trust our fibre cement products knowing that you have made the best choice.





Chose your fixing system:

Hardie® Panel facade claddings can be used with most standard fixing systems on the market. Contact our team for further technical details on the solutions.



Hardie® Panel
Screw Fixing



Hardie® Panel
Rivet Fixing



Hardie® Panel
Secret Fix

INNOVATIVE PRODUCT DESIGN MEETS

Smart Sustainability



Hardie® Panel and
Hardie® Architectural
Panel facade claddings
are setting new
sustainability standards
in facade cladding for
CO₂ and use of resources
– EPD verified.



Innovative Medium Density for European Climate

For our advanced generation of products, we use medium density fiber cement that minimizes resource and CO₂ levels.


Perfectly adapted to the European climate. Perfect suitability for all applications.

- **Smart sustainability**
meets endless design possibilities
- **Lowest global warming potential**
amongst non-combustible facade materials*
- **Unique technology**
engineered for durability in European climate

* production, transport, installation and end-of life stage



Total lifecycle emissions for all Hardie® Panel Products¹

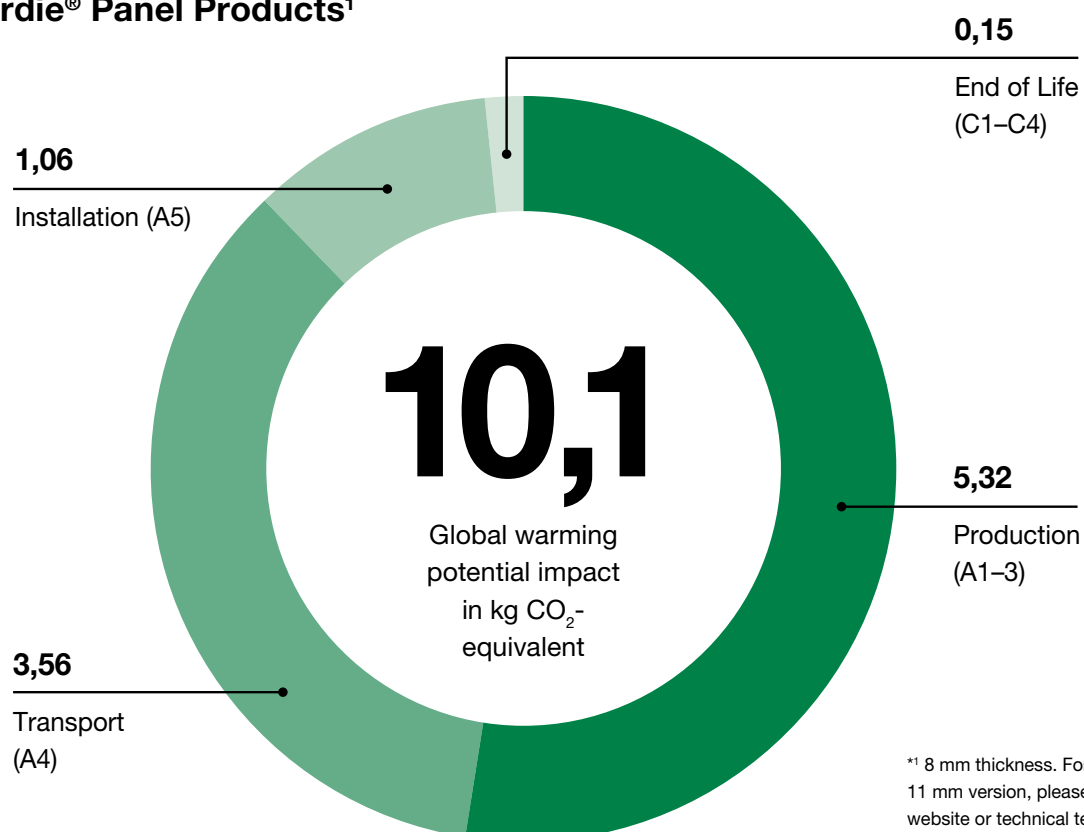

INNOVATIVE PRODUCT DESIGN MEETS

Technical Information



Composition

Hardie® Panel cladding products are made of Portland cement, milded sand, cellulose fibres, water and selected additives.

Quality & Certification

The production of Hardie® Panel cladding is audited annually by external auditors. Hardie® Panel cladding product specifications and classifications comply with EN 12467:2012 and EN13501-1.



Squareness

The panels are supplied square and straight according to EN12467 – level 1. Trimming of 5 mm recommended for optimum squareness

Applications

Purposely designed as an external cladding for residential and commercial buildings in both new build and renovation. Hardie® Panel is a cladding material for rainscreen systems fixed

to a main substrate of timber frame, metal frame or masonry wall construction. Hardie® Panel cladding can be installed horizontally and vertically, with or without insulation.

Sub-Frame

Hardie® Panel cladding can be installed on timber, aluminium or steel sub-frames using corrosion resistant screws or rivets.

Easy installation

Cutting with Hardie™ Blade saw blade, suitable for most cable- or battery-powered circular saws.

Approvals

Construction material class as per EN 13501-1: has a fire classification of A2-s1,d0.

Properties

Fibre cement panels according to EN 12467 – Type A, class 2.

INNOVATIVE PRODUCT DESIGN MEETS

Project Support


Our dedicated team of Hardie® Panel experts have extensive experience and specialist knowledge to support your project. Trust our fibre cement products knowing that you have made the best choice. Contact them using the QR code below to see how we can help meet your requirements.



Contact your individual Hardie® Panel expert:
[jameshardie.eu/contact](https://www.jameshardie.eu/contact)



Find all technical documents:
www.jameshardie.eu/downloads



Order your Hardie® Panel sample now:
www.jameshardie.eu/panel-sample-request





Custom colour

Choosing individual colours for your projects gives you unlimited design flexibility. How will your next project with Hardie® Panel facade panels look like?

You will find the latest version of this brochure in digital form on our website. Technical modifications subject to changes. Should you require additional information, please contact our customer service. All products are guaranteed for 15 years. Further information on our guarantee promise can be found on our website.

Last updated 05/2024

©2024 James Hardie Europe GmbH.

™ and ® denote registered and unregistered trademarks of James Hardie Technology Limited and James Hardie Europe GmbH.



Interstudio OÜ

Pärnu mnt 158

Tallinn, Eesti

<https://interstudio.ee/>

Contact Information:

E-mail: info@interstudio.ee



James Hardie Europe GmbH

Export Department

Bennigsen-Platz 1

40474 Düsseldorf

Germany

www.jameshardie.eu

Contact Information:

Phone: +49 211 54236-200

E-mail: export-jheu@jameshardie.com

har-400-00019/07.24fz

